PUMP PERFORMANCE CURVES

TYPE: SUBMERSIBLE DEAINAGE PUMP	SHL 422	FREQUENCY: 50Hz

	STANDARD SPECIFICATIDNS
DISCHARGE BORE	100 mm
TOTAL HEAD	66/60 m
CAPACITY	2.17/1.1 m^3/min
MOTOR OUTPUT	22 kW
PHASE x VOLTAGE	3 ϕ x 400 v
CURRENT	41.5 A
POLES/REVOLUTION	2 P/ 3000 min^{-1}
STARTING METHOD	STAR DELTA
INSULATION CLASS	F
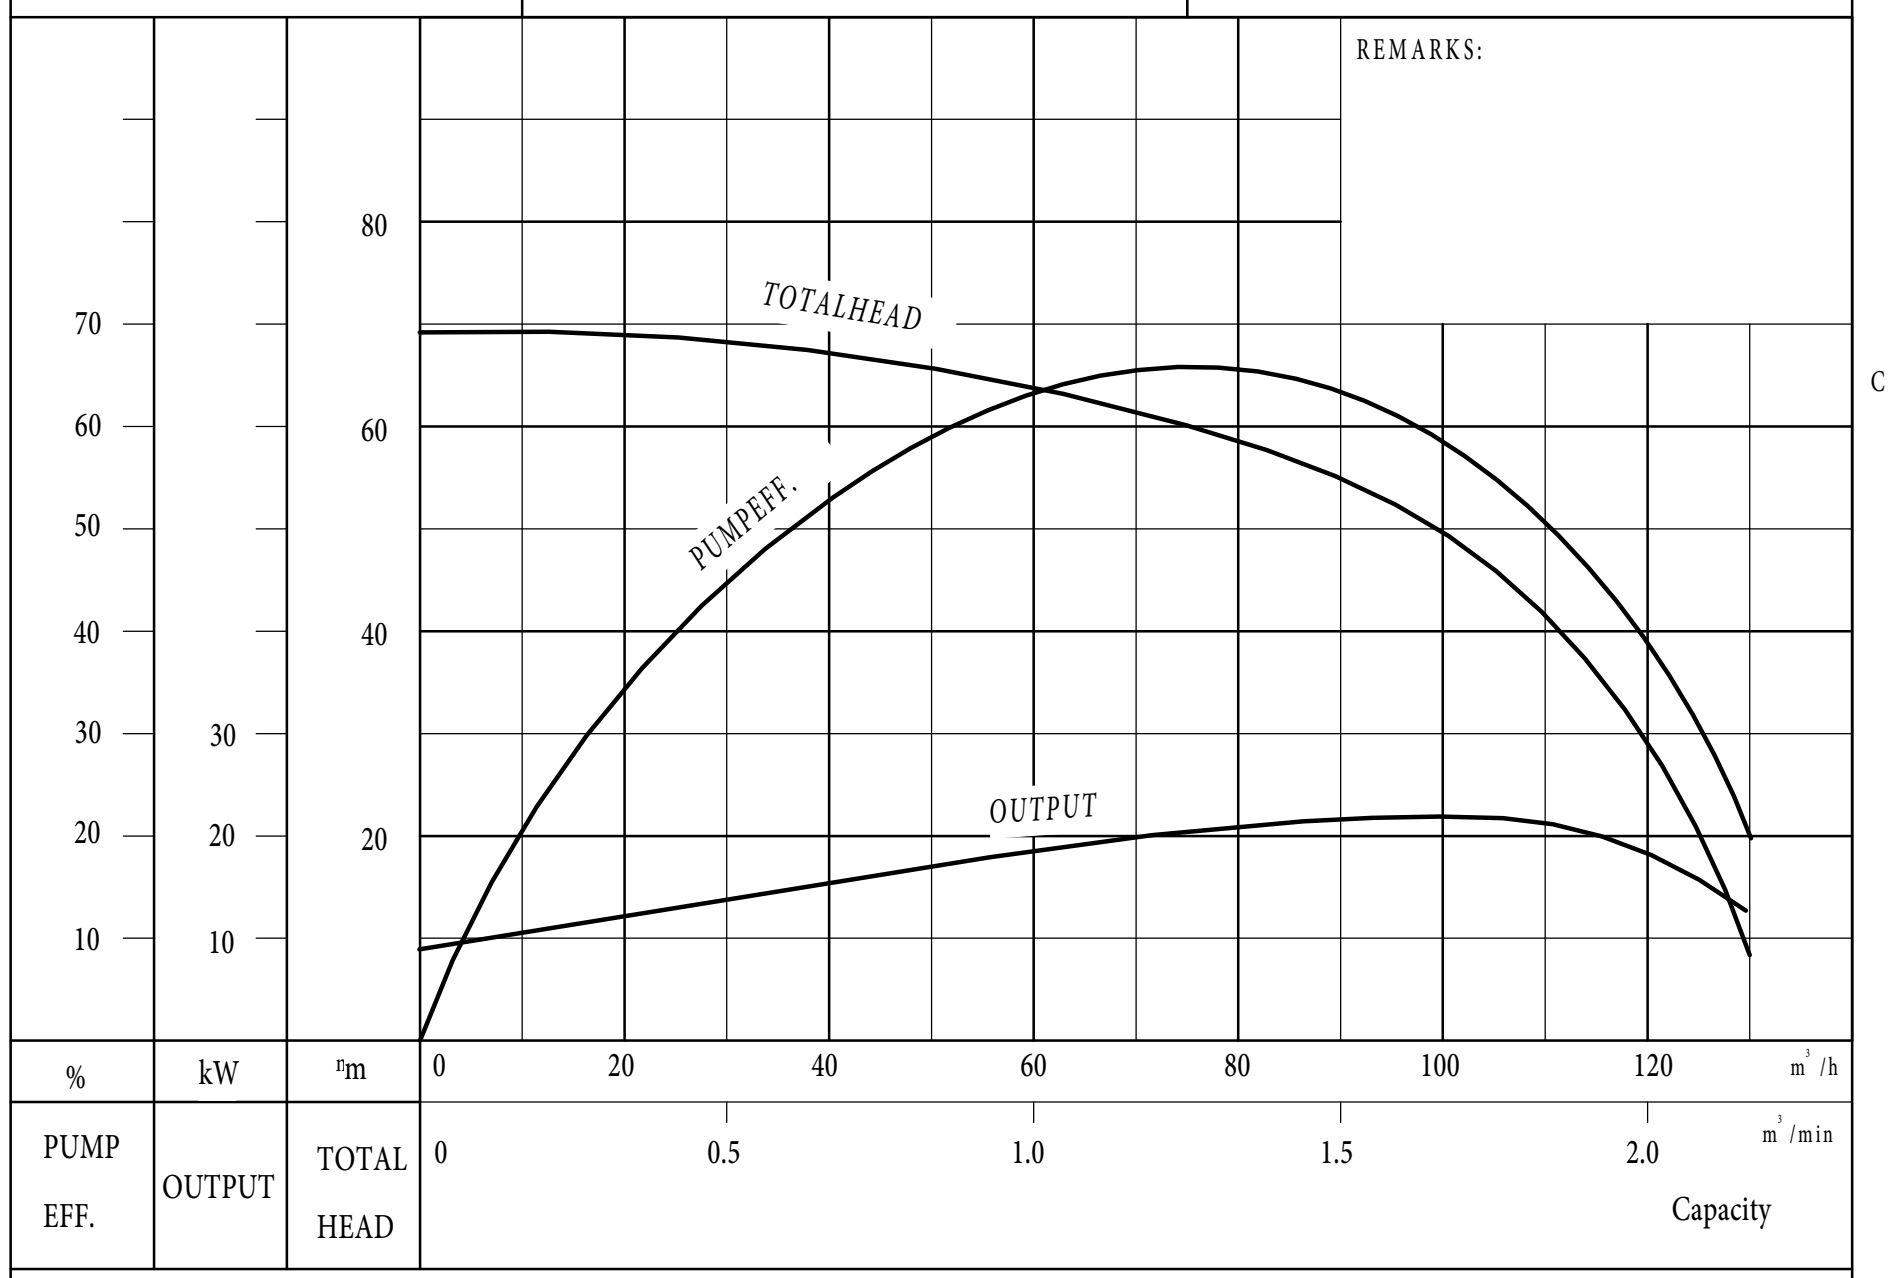
REMARKS: