

PUMP PERFORMANCE CURVES


Type: Submersible Drainage Pump

SHL 645

FREQUENCY: 50Hz

STANDARD SPECIFICATIONS

DISCHARGE BORE	150	mm
TOTAL HEAD	90/80	m
CAPACITY	3.67/1.4	m ³ /min
MOTOR OUTPUT	45	kW
PHASE x VOLTAGE	3 ϕ x 400	v
CURRENT	85	A
POLES/REVOLUTION	2 P/ 3000	min ⁻¹
STARTING METHOD	STAR DELTA	
INSULATION CLASS	F	

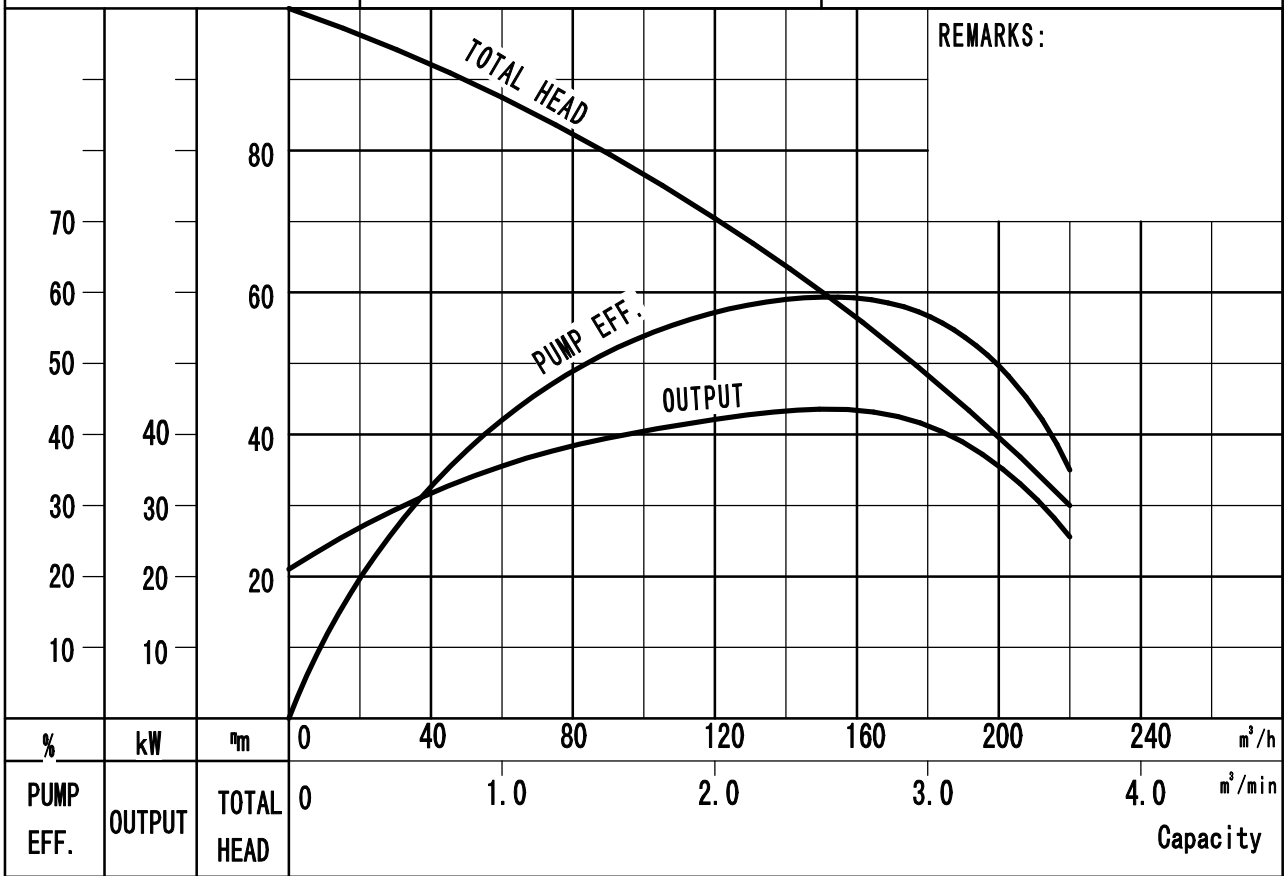

PUMP EFF.	OUTPUT	TOTAL HEAD	0	1.0	2.0	3.0	4.0	m ³ /min
								Capacity